
**FEATURES:**

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: Nano-Lit LED Strips.
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for recessed, recessed T-Bar installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Proprietary Nano-Lit Quantum Dot Technology >90CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

**ED VECTOR4+**  SIZE —  SOURCE —  RADIANCE —  VOLTAGE —  DRIVER —  MOUNTING —  LENS —  FINISH —  CCT

Enter the Product Code into the boxes above.

**SIZE**  
 \_\_\_\_\_ Feet\*

\* Available only with 2feet increment.

**SOURCE**  
 12.5 W/Ft LED

**RADIANCE**  
 DD - Direct (100%Down)  
 \*Light Distribution.

**VOLTAGE**  
 120V  
 277V  
 347V\*

\*Not available for all configurations.

**DRIVER**  
 BT - Nano-Lit Bluetooth

**MOUNTING**  
 RT - Recessed Trimless  
 RB - Recessed T-Bar

**LENS**  
 OP - Opal

**FINISH**  
 WH - White  
 BK - Black  
 GR - Grey

**CCT**  
 CR - Circadian Rythm

**LUMEN OUTPUT W/Ft:**

Watts	2700K-6500k
12.5W	Avg. 1212.5 lm

**Project:**

**Type:**

## SIZE:




Size	L (CUTOUT)	L1 (T-BAR)
2 Feet	23.25 Inch	23.75 Inch
4 Feet	45.25 Inch	45.75 Inch
6 Feet	67.25 Inch	67.75 Inch
8 Feet	89.25 Inch	89.75 Inch

## RADIANCE:


### DIRECT DISTRIBUTION



## MOUNTING:

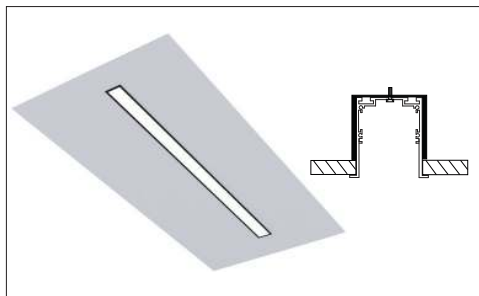


RECESSED

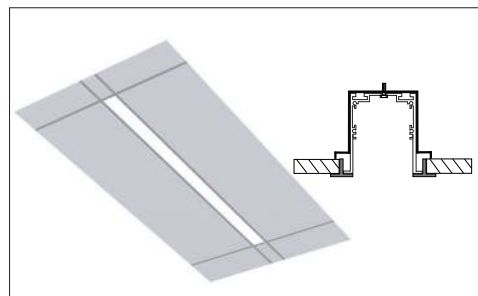

RECESSED T-BAR



90° IN (WALL TO CEILING)

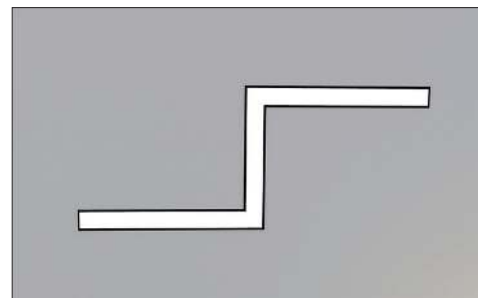

90° LEFT/90° RIGHT